

CAT6-75—CATEGORY 6 SOLID-STATE BUILDING ENTRANCE PROTECTOR



Features

- UL Listed for Primary (497) and Isolated Loop (497B) applications.
- Exceeds TIA/EIA Standards 568B.2-1 and 758 for category 6 performance.
- Solid-state protection provides the fastest response to transient voltages (1–5 nanoseconds) by quickly diverting damaging surges to ground.
- Use between buildings in a campus environment as a building entrance protector or in hostile industrial applications as an isolated loop protector.
- **Expandable System Protection**—towerMAX Series Base Units and Modules can be attached to expand system protection as your system grows.
- **Lifetime Product Warranty**—This surge protector shall be free of any defects in design, materials, or workmanship, or ITW Linx will repair or replace the defective product.
- **\$50,000 Connected Equipment Warranty**—This ITW Linx product will protect your equipment or we will repair or replace it up to \$50,000!

Technical Specifications

Designs and specifications are subject to change without notice due to product improvement.

PRODUCT SPECIFICATIONS:

Agency Approval	UL Primary (497) and Isolated Loop (497B)
LED Indicators	N/A
Grounding Requirements	Uses Electrical AC ground, for use with towerMAX Series AC Base Units. See Technical Reference page 106–107 for additional grounding tips
Recommended Ground Impedance	< 0.5 Ohm
Width	4.25"
Height	4.25"
Depth	1.5"
Weight	0.42 lbs
Product Warranty	Lifetime
Connected Equipment Warranty	Up to \$50,000



For up-to-date warranty information see our web site: www.itwlinx.com



AC SURGE PROTECTION:

SurgeGate Plus Circuitry	N/A
Protect or Disconnect Circuitry	N/A
Thermal Fusing	N/A
Catastrophic Surge Circuit	N/A
Over/Undervoltage Voltage Protection	N/A
Overvoltage Voltage Shutoff	N/A
Undervoltage Voltage Shutoff	N/A
Single Pulse Energy Dissipation	N/A
Peak Impulse Current	N/A
EMI/RFI Noise Filtration	N/A
Line Voltage	N/A
Initial Clamping Level	N/A
Clamping Level	N/A
Protection Modes	N/A
Maximum Current Rating	N/A
Response Time	N/A
Plug Configuration	N/A
Number of Outlets	N/A
Switched Outlets	N/A
Cord Length	N/A

SIGNAL LINE SURGE PROTECTION:

TELCO CIRCUIT PROTECTION

Signal Perfect Circuitry	Yes
Fuseless/Auto-Resettable	Yes
Clamping Level	75V
Response Time	1–5 Nanoseconds
Capacitance	N/A
Suppression Modes	N/A
Wires Protected	4-pairs
Termination Type	110 Punchdown

COAX CIRCUIT PROTECTION

Signal Perfect Circuitry	N/A
Fuseless/Auto-Resettable	N/A
Response Time	N/A
Termination	N/A
Antenna/Cable Lines Protected	N/A
Antenna/Cable Clamping Level	N/A
Antenna/Cable Attenuation	N/A
Satellite Lines Protected	N/A
Satellite Clamping Level	N/A
Satellite Attenuation	N/A

LAN CIRCUIT PROTECTION

Signal Perfect Circuitry	Yes
Fuseless/Auto-Resettable	Yes
Performance Rating	Cat 6
Clamping Level	75V
Response Time	1–5 Nanoseconds
Capacitance	< 20pF
Wires Protected	4-pairs
Termination Type	110 Punchdown



More information is available in the Technical Reference section of this catalog, turn to page 92.

Ordering Information


ITW Linx Part Number	Description	Termination Type
CAT6-75	Protects high-performance 4-pair Category 6 Outside Plant Cables as well as Category 6 UTP cables for voice or ISDN low-voltage (digital, 75V) applications.	110 Punchdown

Can also be used for end-span POE applications where power and data are on the all 4-pairs.

ITW LINX INNOVATIVE PROTECTION CIRCUITRY FEATURING:

SurgeGate Plus Circuitry


Protects against prolonged overvoltages and undervoltages by automatically disconnecting the power to your equipment, then reconnecting it when the power has returned to a safe level. This patented circuitry acts as a gate to prevent unsafe voltages from damaging sensitive equipment.

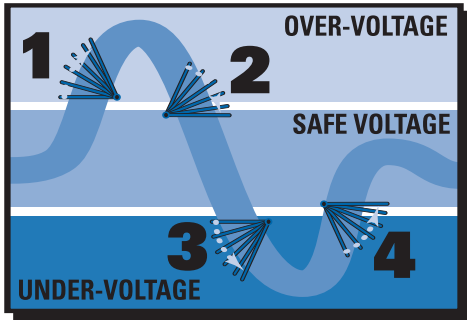

- 1.) Overvoltage **DISCONNECT**
- 2.) Safevoltage **RECONNECT**
- 3.) Undervoltage **DISCONNECT**
- 4.) Safevoltage **RECONNECT**

Protect or Disconnect Circuitry

Protects equipment against all surges. In the event of a catastrophic surge such as lightning, it completely disconnects AC power to the connected equipment and to the protector.

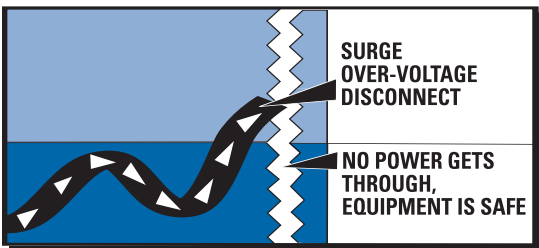

Signal Perfect Circuitry

Auto-resetting surge protection for data networks, telephone and coax lines. This optimized circuitry ensures a clean, clear signal and features solid-state suppressors for maximum protection and reliability.

